

Xprinter[®]

XP-C260M

THERMAL RECEIPT PRINTER

Printing speed
300mm/s
or 260mm/s

Sound and
light
alarm

Interface
Serial+
USB+Lan



Sound and light alarm



Example

Xprinter 芯燁
XINYE

麻辣重庆面	x1	356.00元
たまごのタルト	x5	250.00元
جاج دلا فئافل	x1	70.00元
닭고기	x2	115.00元
albõndiga	x1	560.00元

Total x10 1351.00元
Payment : Credit Card

McDonald ★★★★★
looking forward to your next visit

 关注二维码
Scan QR Code


0 00 00 00 00 00 00

LOGO printing

Text printing


Symbol printing

1D/2D code printing

Technical Specification

Model	XP-C260M
Printing method	Direct thermal
Paper width	80mm
Printing speed	260mm/s (300mm/s can customize)
Interface	Serial+USB+Ethernet
Auto cutter	Yes
Cutter life	1.5 million cuts
Printer head life	150KM
Print command	Compatible ESC/POS
Paper supply method	Easy paper loading
Driver	Windows / Linux
NV Flash	256K Bytes
SRAM	128K Bytes
Character size	ANK, Font A: 1.5x3.0mm (12x24 dots) Font B:1.1x2.1mm (9x17 dots) Chinese, traditional Chinese:3.0x3.0mm (24x24 dots)
Extension character sheet	PC347 (Standard Europe), Katakana, PC850(Multilingual), PC860(Portuguese), PC863(Canadian-French), PC865(Nordic), West Europe, Greek, Hebrew, East Europe, Iran, WPC1252, PC866(Cyrillic#2), PC852(Latin 2), PC858, IranII, Latvian, Arabic, PT151(1251)
Barcode types	1D: UPC-A/UPC-E/JAN13(EAN13) / JAN8(EAN8) / CODE39 / ITF / CODABAR / CODE93 / CODE128 2D: QRCODE/PDF417
Power supply	Input: AC 100-240V, 50-60Hz Output: DC 24V/2.5A
Cash drawer output	DC 24V/1A
Operating temperature	0-45°C, 10-80%RH
Storage temperature	- 40-60°C, ≤93%RH
Dimension	188x140x137.7mm (WxDxH)
Weight	1.1kg

IAP online firmware update

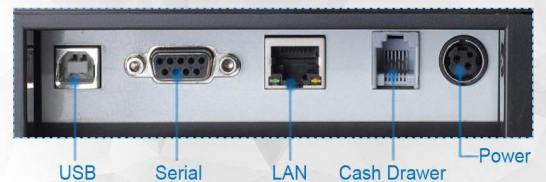

XP-C260M Supports wall-mounting Xprinter®



GUANGZHOU SYSE ELECTRONIC TECHNOLOGY CO., LTD.

Add: 1802, 18/F Changfeng International, Zengcheng District, Guangzhou, Guangdong, China 511340

Web: www.sysepos.com | sysepos.en.alibaba.com

E-mail: tina@sysepos.com

Tel: +86 1371 1213 435